# · ·		By Express Mail # EL5138597850
,	522 Rec'd P	CT/PTO 0 1 MAR 2000
FORM PTO-1390 (REV 10-94)	U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE	DOCKET #: 4797-8PUS
	LETTER TO THE UNITED STATES	
	OFFICE (DO/EO/US) CONCERNING A FILIN	1G
U	NDER 35 U.S.C. 371	V.C. ADDY ICATION NO.
		U.S. APPLICATION NO.
		0947486784
INTERNATIONAL APPLICATION NO	INTERNATIONAL FILING DATE	PRIORITY DATE CLAIMED
PCT/DE98/01995	July 16, 1998	July 01, 1998
TITLE OF INVENTION	to de Colon Contribut Fool Decidoral	And Wests Metaviols
Appnance For Gas	dification of Carbon-Containing Fuel, Residual	And waste wraterials
A PRI LO A MINO TOR PO TO ITO I IO		
APPLICANT(S) FOR DO/EO/US  Ralf DO	NNER; Dietmar DEGENKOLB; Manfred SCI	HINGNITZ
2 2 0	<u> </u>	
	77 : 1 C	0.77(0) 4 6 11
Applicant herewith submits to the information:	United States Designated/Elected Office (DO/EG	J/US) the following items and other
information:		
4 5 7001 : 2000 000 1 : :	C: 1 25 H C C 27	1
	n of items concerning a filing under 35 U.S.C. 37 <b>SEQUENT</b> submission of items concerning a filing	
	in national examination procedures (35 U.S.C. 37	
	tion of the applicable time limit set in 35 U.S.C. 37	
39(1).	tion of the applicable time time set in 33 c.s.c.	571(0) and 1 01 11 11 10 10 5 22 and
	national Preliminary Examination was made by th	ne 19th month from the earliest
claimed priority date.	and the same of the	
	Application as filed (35 U.S.C. 371(c)(2))	
	required only if not transmitted by the Internation	nal Bureau).
b.[] has been transmitted by		,
c. [] is not required, as the ap	plication was filed in the United States Receiving	g Office (RO/US)
6. [x]A translation of the Internat	tional Application into English (35 U.S.C. 371(c)	(2)).
	of the International Application under PCT Article	
	(required only if not transmitted by the Internation	onal Bureau).
b.[] have been transmitted by	y the International Bureau.	

- c. [] have not been made; however, the time limit for making such amendments has NOT expired.
- d.[] have not been made and will not be made.
- 8. [] A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
- 9. [x] An EXECUTED oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
- 10.[] A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5).

#### Items 11. to 16. Below concern other document(s) or information included:

- 11.[x]An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
- 12.[x]An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
- 13.[x]A **FIRST** preliminary amendment.
  - [] A SECOND or SUBSEQUENT preliminary amendment.
- 14. A substitute specification.
- 15.[] A change of power of attorney and/or address letter.
- 16.[x]Other items or information (specify): Int'l Search Report, PCT Notification of Receipt of Record Copy, Request for Correction, Notification of Acceptance of Correction

513859785US

NEY'S DOCKET NUMBER

Form PTO-1390 (REV 10-94)

551 Fifth Avenue, Suite 1210

New York, New York 10176

Cohen, Pontani, Lieberman & Pavane

Klaus P. Stoffel

Klaus P. Stoffel

Tel: (212) 687-2770

Registration Number: 31,668

# 09/486784 428 Rect PCT/PTD 01 MAR 2000

By Express Mail # EL513859785US · March 1, 2000

Attorney Docket # 4797-8PUS

### IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re National Phase PCT Application of

Ralf DONNER et al.

International Appln. No.:

PCT/DE98/01995

International Filing Date:

July 16, 1998

For:

Appliance For

Gasification of

of Carbon-

Containing Fuel, Residual And Waste Materials

## PRELIMINARY AMENDMENT

Assistant Commissioner for Patents Washington, D.C. 20231

**BOX PCT** 

SIR:

Prior to the issuance of a first Office Action and simultaneously with the filing of the present application, please amend said application as follows:

### In the Specification:

Page 1, delete line 3 and insert --Background of the Invention, Field of the

Invention--;

line 6, delete "in accordance with the first patent claim and the" and

insert --.-;

delete line 7 in its entirety and insert -- Discussion of the Prior

Art--.

Page 2, line 13, after "(" insert --see German reference--; line 17, after "(" insert --see German reference--.

Page 4, after line 14, insert --Summary of the Invention--; delete lines 19, 20, 21 and 22 in their entirety.

Page 5, line 11, delete "with reference to Figures" and insert --.--; delete line 12 in its entirety and insert:

--The various features of novelty which characterize the invention are pointed out with particularity in the claims annexed to and forming a part of the disclosure. For a better understanding of the invention, its operating advantages, and specific objects attained by its use, reference should be had to the drawing and descriptive matter in which there are illustrated and described preferred embodiments of the invention.

Brief Description of the Drawings

Figure shows a cross-section through a gasification reactor pursuant to the present invention; and

Figure 2 shows an enlarged segment of the gasification reactor of Figure 1.

Detailed Description of the Preferred Embodiments--.

Page 6, line 4, after "gap" insert --5--;
line 10, delete "its" and insert --the--;
line 10, after "surface" insert --of the wall 4--;
line 15, after "as" insert --a--;
line 20, delete "coating" and insert --protective layer--;
line 22, delete "10".

Page 7, line 6, delete "10";

after line 27, insert --The invention is not limited by the embodiments described above which are presented as examples only but can be modified in various ways within the scope of protection defined by the appended patent claims.--.

Delete page 8 in its entirety.

In the Claims:

Please cancel claims 1-5, and add the following new claims:

--6. An appliance for gasification of carbon- and ash-containing fuel, residual and waste materials using an oxygen-containing oxidizing agent at temperatures above a melting point of inorganic fractions and at pressures between atmospheric pressure and 80 bar, comprising a reaction chamber designed as an entrained-bed reactor, the reaction chamber having a contour delimited by a cooled reactor wall of the following structure, from the outside inward:

a pressure shell;

a cooling wall;

a water-cooled cooling gap between the pressure shell and the cooling wall;

a ceramic protection for the cooling wall; and

a layer of slag, pressure and temperature of the cooling gap between the pressure shell and the cooling wall being controllable so that the reactor can be operated above and below a boiling point of cooling water, pressure in the cooling gap being higher than pressure in the gasification chamber.

7. An appliance for gasification of carbon-containing, ash-free fuel, residual and waste materials using an oxygen-containing oxidizing agent at temperatures above 850°C and at pressures between atmospheric pressure and 80 bar, comprising a reaction chamber designed as an entrained-bed reactor having a contour delimited by a cooled reactor wall of the following structure, from the outside inward:

a pressure shell,

a cooling wall,

a water-cooled gap between the pressure shell and the cooling wall;

a ceramic protection for the cooling wall, and

a refractory lining, the cooling gap between the pressure shell and the cooling wall being operable, with a filling of pressurized water, above or below a boiling

-4-

point of the cooling water, pressure in the cooling gap being higher than pressure in the gasification chamber.

- 8. An appliance as defined in claim 6, wherein the cooling wall comprises half-tubes which are welded together in a gastight manner, are pinned and are coated with a thin layer of ceramic mass with a high thermal conductivity.
- 9. An appliance as defined in claim 7, wherein the cooling wall comprises half-tubes which are welded together in a gastight manner, are pinned and are coated with a thin layer of ceramic mass with a high thermal conductivity.
- 10. An appliance as defined in claim 8, wherein the thin layer of ceramic mass is a flame-sprayed layer on the cooling wall.
- 11. An appliance as defined in claim 9, wherein the thin layer of ceramic mass is a flame-sprayed layer on the cooling wall.
- 12. An appliance as defined in claim 6, wherein the cooling wall has geometric shapes.
- 13. An appliance as defined in claim 7, wherein the cooling wall has geometric shapes.

- 14. An appliance as defined in claim 6, wherein the cooling wall is one of trapezium-shaped, triangular, rectangular, of undulating form and of smooth form.
- 15. An appliance as defined in claim 7, wherein the cooling wall is one of trapezium-shaped, triangular, rectangular, of undulating form and of smooth form.--

### In the Abstract:

Delete the present abstract in its entirety and insert the following therefore:

--An appliance for the gasification of carbon- and ash-containing fuel, residual and waste materials using an oxygen-containing oxidizing agent at temperatures above the melting point of the inorganic fractions, in a reaction chamber which is designed as an entrained-bed reactor, at pressures between atmospheric pressure and 80 bar, preferably between atmospheric pressure and 30 bar, the contour of the reaction chamber being delimited by a cooled reactor wall. The cooled reactor wall having the following structure, from the outside inward: a pressure shell, a cooling wall, a water-cooled gap between the pressure shell 3 and the cooling wall, a ceramic protection for the cooling wall, and a layer of slag.

The pressure and temperature of the cooling gap between the pressure shell and the cooling wall is controlled in such a way that it can be operated above and below the boiling point of the cooling water. The pressure in the cooling gap is higher than the pressure in the gasification chamber.--

Delete page 13 in its entirety.

## **REMARKS**

The present amendment is being submitted prior to the issuance of a first Office Action and simultaneously with the filing of the present application.

With this amendment applicants have amended the specification, cancelled claims 1-5 and added new claims 6-15, all in an effort to place the application in better condition for examination.

Favorable action on the present application is respectfully requested.

Any additional fees or charges required at this time in connection with the application may be charged to our Patent and Trademark Office Deposit Account No. 03-2412.

Respectfully submitted, COHEN, PONTANI, LIEBERMAN & PAVANE

Bv:

Klaus P. Stoffel

Reg. No. 31,668

551 Fifth Avenue, Suite 1210

New York, N.Y. 10176

(212) 687-2770

1 March 2000

3/85x2.

No. ELS13859785US
428 Recid PCT/PTO 0 1 MAR 2000

# Appliance for gasification of carbon-containing fuel, residual and waste materials

### Description

The invention relates to an appliance for gasification of carbon-containing fuel, residual and waste materials in accordance with the first patent claim and the second patent claim.

Fuel and waste materials are to be understood as meaning those with or without an ash content, such as brown or hard coals and their cokes, water/coal suspensions, but also oils, tars and slurries, as well as residues or wastes from chemical and wood pulping processes, such as for example black liquor from the Kraft process, as well as solid and liquid fractions from the waste management and recycling industry, such as used oils, PCB-containing oils, plastic and domestic refuse fractions or their processing products, lightweight shredded material from the processing of automotive, cable and electronics scrap, and contaminated aqueous solutions and gases. The invention can be used not only for entrained-bed gasifiers, but also for other gasification systems, such as fixed-bed or fluidized-bed gasifiers or combinations thereof.

The autothermal entrained-bed gasification of solid, liquid and gaseous fuel materials has been known for many years in the field of gas generation. The ratio of fuel to

oxygen-containing gasification agents is selected in such a way that, for reasons of quality of the synthesis gas, higher carbon compounds are cleaved completely to form synthesis-gas components, such as CO and H<sub>2</sub>, and the inorganic constituents are discharged in the form of a molten liquid (J. Carl, P. Fritz, NOELL-KONVERSIONSVERFAHREN [NOELL CONVERSION PROCESS], EF-Verlag für Energie- und Umwelttechnik GmbH, Berlin, 1996, p. 33 and p. 73).

Using various systems which have gained acceptance in the prior art, gasification gas and the molten liquid inorganic fraction, e.g. slag, can be discharged from the reaction chamber of the gasification appliance separately or together (DE 19718131.7).

Both systems which are provided with a refractory lining or cooled systems have been introduced for internally delimiting the reaction chamber of the gasification system (DE 4446803 A1).

Gasification systems which are provided with a refractory lining have the advantage of low heat losses and therefore offer an energy-efficient conversion of the fuel materials supplied. However, they can only be used for ashfree fuel materials, since the liquid slag which flows off the inner surface of the reaction chamber during the entrained-bed gasification dissolves the refractory lining and therefore only allows very limited operating times to be achieved before an expensive refit is required.

In order to eliminate this drawback which is encountered with ash-containing fuel materials, cooled systems working on the principle of a diaphragm wall have therefore been provided. The cooling initially results in the formation of a solid layer of slag on the surface facing the reaction chamber, the thickness of which layer increases until the further slag ejected from the gasification chamber runs down this wall in liquid form and flows out of the reaction chamber, for example together with the gasification gas. Such systems are extremely robust and guarantee long operating times. A significant drawback of such systems consists in the fact that up to approx. 5% of the energy introduced is transferred to the cooled screen.

Various fuel and waste materials, such as for example heavy-metal- or light-ash-containing oils, tars or tar-oil solid slurries contain too little ash to form a sufficiently protective layer of slag with cold reactor walls, resulting in additional energy losses, yet on the other hand the ash content is too high to prevent the refractory layer from melting away or being dissolved if reactors with a refractory lining were to be used and to allow sufficiently long operating times to be achieved before a refit is required.

A further drawback is the complicated structure of the reactor wall, which may lead to considerable problems during production and in operation.

For example, the reactor wall of the entrained-bed gasifier shown in J. Carl, P. Fritz: NOELL-

KONVERSIONSVERFAHREN [NOELL CONVERSION PROCESS], EF-Verlag für Energie- und Umwelttechnik GmbH, Berlin, 1996, p. 33 and p. 73 comprises an unpressurized water shell, the pressure shell, which is protected against corrosion on the inside by a tar/epoxy resin mixture and is lined with lightweight refractory concrete, and the cooling screen, which, in the same way as a diaphragm wall which is conventionally used in the construction of boilers, comprises cooling tubes which are welded together in a gastight manner, through which water flows, which are pinned and which are coated with a thin layer of SiC. Between the cooling screen and the pressure shell, which is lined with refractory concrete, there is a cooling-screen gap which has to be purged with a dry, oxygenfree gas in order to prevent flow-back and condensation.

Working on the basis of this prior art, the object of the invention is to provide an appliance which, while being simple and reliable to operate, is able to cope with a very wide range of ash contents in the fuel and waste materials.

This object is achieved by means of the features of the claims 1 and 2.

A further configuration of the appliance according to the invention is given in the later claims.

The appliance according to the invention is suitable for the gasification of fuel, waste and residual materials with a very wide range of ash contents, and for the combined gasification of hydrocarbon-containing gases, liquids and solids.

According to the invention, the contour of the reaction chamber for the gasification process is delimited by a refractory lining or by a layer of solidified slag. If the reaction chamber is lined with refractory material, intensive cooling protects this material or causes liquid slag to solidify, so that a thermally insulating layer is formed. The cooling is provided by a water-filled cooling gap, it being possible to set operating conditions above or below the boiling point.

The invention will be explained in more detail on the basis of two exemplary embodiments with reference to Figures 1 and 2.

In the first exemplary embodiment, Figure 1 shows the gasification reactor. The conversion of the fuel, residual and waste materials using the oxygen-containing oxidizing agent to form a crude gas containing high levels of H<sub>2</sub> and CO takes place in the reaction chamber 1. The gasification media are supplied by means of special burners which are attached to the burner flange 2. The crude gasification gas, if appropriate together with liquid slag, leaves the reaction chamber 1 via the opening 8, which is provided with a special appliance, and passes to downstream cooling, scrubbing and processing systems. The gasification reactor is surrounded by the pressure shell 3, which absorbs the difference in pressure between the reaction chamber 1 and the outside atmosphere. For its thermal protection, there is a cooling gap 5 which, filled with water, can be operated above or

below the boiling point, which depends on the overall pressure. To prevent gasification gas from entering the cooling gap 5 in the event of damage, the pressure of this gap is always maintained at a higher level than the pressure in the reaction chamber 1. On the inside, the cooling gap 5 is delimited by a cooling wall 4. The hot water or steam generated in the cooling gap 5 is discharged via the connection piece 9. The cooling wall 4 may be provided with a thin, ceramic protective layer 6 which is fixedly bonded to its surface. Depending on the process pressure, the temperatures in the cooling gap 5 may be between 50 and 350°C. In the case of gasification of starting materials which contain very little or no ash, it is advantageous to line the cooling wall 4 with refractory, thermally insulating brickwork as refractory lining 7 in order to limit the introduction of heat into the cooling gap 5. If ashcontaining fuel, residual and waste materials are used, it is possible to dispense with the refractory brickwork 7. The liquid slag which forms in the reaction chamber 1 is cooled on the cold surface of the cooling wall 4 and its coating 6, solidifies and in this way forms a refractory lining as a layer of slag 10 which grows toward the reaction chamber 1 until the temperature has reached the melting point of the slaq. The further slaq which is then ejected runs off as a film of slag and is discharged together with the hot crude gas via the opening 8.

Figure 2 shows one example of the design of the cooling wall 4. In this case, this wall comprises a wall made from half-tubes which have been welded together in a gastight manner, are pinned and are combined with a thin layer of silicon carbide. The ceramic lining is situated on the side facing toward the reaction chamber 1, as a layer of slag 10 which, as shown in Example 1, is applied artificially or forms naturally through its own molten ash. Other forms of the cooling wall, such as for example a wall made from corrugated sheet metal, in the shape of a trapezium, triangle or rectangle, are possible depending on the production techniques employed. The ceramic protection 6 may be applied and secured by mechanical holding means, as in Example 2, or by chemical bonding or thermal application, such as by flame spraying.

Furthermore, it will be readily understood that the design of the wall which delimits the reaction chamber 1, including parts 3, 4, 5, 6 and 7, which is explained in Example 2, can be used not only for the entrained-bed gasification reactors, which are subject to high thermal loads, but also for other gasification systems, such as for example fixed-bed or fluidized-bed gasifiers or combinations thereof.

# List of reference numerals used

- 1 Reaction chamber
- 2 Flange for burner fitting
- 3 Pressure shell
- 4 Cooling wall
- 5 Cooling gap
- 6 Ceramic protection for the cooling wall
- 7 Refractory lining of the reactor
- 8 Opening for the gas and slag outlet member
- 9 Connection piece for steam or hot water
- 10 Layer of slag

# Patent claims

- 1. An appliance for the gasification of carbon- and ashcontaining fuel, residual and waste materials using an
  oxygen-containing oxidizing agent at temperatures above the
  melting point of the inorganic fractions, in a reaction
  chamber which is designed as an entrained-bed reactor, at
  pressures between atmospheric pressure and 80 bar, preferably
  between atmospheric pressure and 30 bar, the contour of the
  reaction chamber being delimited by a cooled reactor wall of
  the following structure, from the outside inward:
- pressure shell (3)
- cooling wall (4)
- water-cooled cooling gap (5) between pressure shell (3) and cooling wall (4)
- ceramic protection (6) for the cooling wall (4)
- layer of slag (10)
- and the pressure and temperature of the cooling gap (5) between pressure shell (3) and cooling wall (4) being controlled in such a way that it can be operated above and below the boiling point of the cooling water, the pressure in the cooling gap being higher than the pressure in the gasification chamber.
- 2. An appliance for gasification of carbon-containing, ash-free fuel, residual and waste materials using an oxygen-containing oxidizing agent at temperatures above 850°C, in a reaction chamber which is designed as an entrained-bed

reactor, at pressures between atmospheric pressure and 80 bar, preferably between atmospheric pressure and 30 bar, the contour of the reaction chamber being delimited by a cooled reactor wall of the following structure, from the outside inward:

- pressure shell (3)
- cooling wall (4)
- water-cooled gap (5) between pressure shell (3) and cooling wall (4)
- ceramic protection (6) for the cooling wall (4)
- refractory lining (7)

and it being possible for the cooling gap (5) between the pressure shell (3) and cooling wall (4) to be operated, with a filling of pressurized water, above or below the boiling point of the cooling water, the pressure in the cooling gap (5) being higher than the pressure in the gasification chamber (1).

- 3. The appliance as claimed in claims 1 and 2, in which the cooling wall (4) comprises half-tubes which have been welded together in a gastight manner, are pinned and are coated with a thin layer of ceramic mass with a high thermal conductivity.
- 4. The appliance as claimed in claims 1 and 2, in which the thin layer of ceramic mass is applied to the cooling wall (4) by flame spraying.
- 5. The appliance as claimed in claims 1 to 4, in which the cooling wall (4) may be of geometric shapes, such as

The first price are the first of the first o

trapezium-shaped, triangular, rectangular, of undulating or smooth form.

# Abstract

The invention relates to an appliance for the gasification of carbon- and ash-containing fuel, residual and waste materials using an oxygen-containing oxidizing agent at temperatures above the melting point of the inorganic fractions, in a reaction chamber which is designed as an entrained-bed reactor, at pressures between atmospheric pressure and 80 bar, preferably between atmospheric pressure and 30 bar, the contour of the reaction chamber being delimited by a cooled reactor wall of the following structure, from the outside inward:

- pressure shell 3
- cooling wall 4
- water-cooled gap 5 between pressure shell 3 and cooling
   wall 4
- ceramic protection 6 for the cooling wall 4
- layer of slag 10

and the pressure and temperature of the cooling gap 5 between pressure shell 3 and cooling wall 4 being controlled in such a way that it can be operated above and below the boiling point of the cooling water, the pressure in the cooling gap 5 being higher than the pressure in the gasification chamber 1. (Fig. 1)

Key to figures:

Figur  $\rightarrow$  Figure




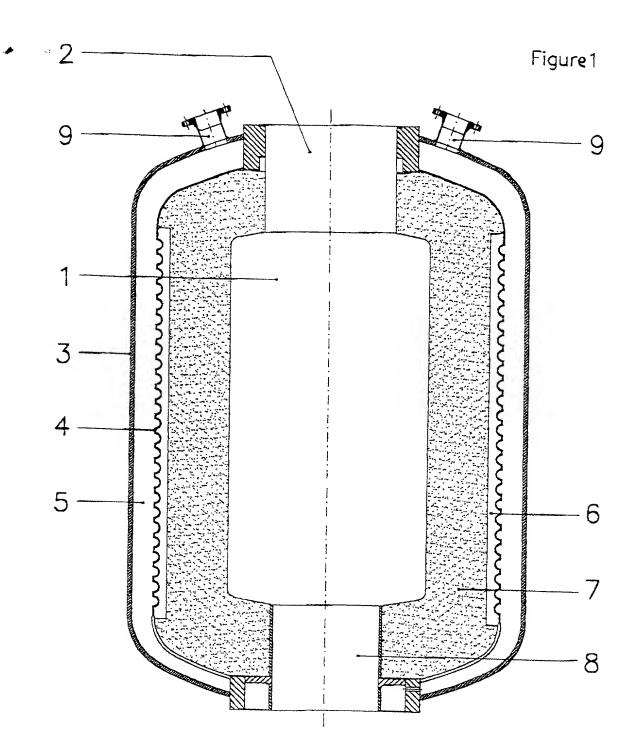


Figure 2

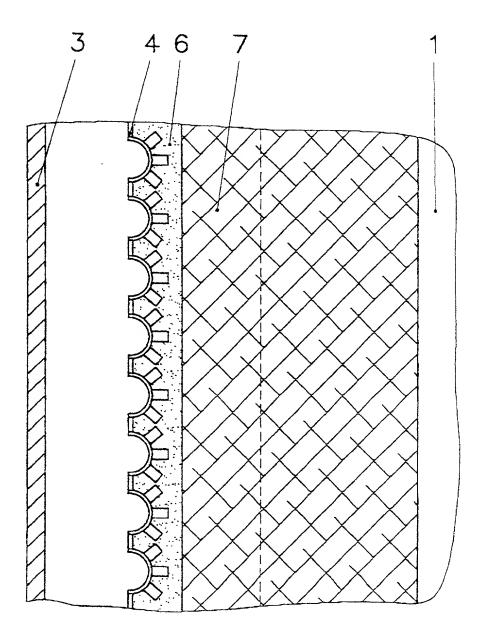

# COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY Includes Reference to PCT International Applications

Attorney's Docket No. 4797-8PUS

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention emitted:

VORRICHTUNG ZUR VERGASUNG VON KOITLENSTOFFHALTIGEN BRENN-, REST- UND ABFALLSTOFFEN

the specification of which (check only one item below)

[] is attached hereto

[] was filed as United States application

Serial No. \_

on\_

and was amended

on \_ (if applicable).

[x] was filed as PCT international application

Number PCT/DE98/01995

on <u>16 July 1998</u>

and was amended under PCT Article 19

on \_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of the application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by the un the same subject matter having a filing date before that of the application(s) of which priority is claimed.

PRIOR FOREIGN/PCT APPLICATIONS AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. 119:				
Country (if PCT, indicate "PCT")	Application Number	Date of Filing (day, month, year)	Priority Under 35	Claimed J.S.C. 119
Germany	198 29 385.2	01 July 1998	[x] YES	טא נו
PCT	PCT/DE98/01995	16 July 1998	[x] YES	U NO
77.			[] YES	סא []
	·		[] YES	[] NO
			1 YES	□ №
			[] YES	[] NO
			U YES	סא 🗓

Page inf4

U.S. DRPARTMENT OF COMMERCE Parent and Trademone Cattle 120 (11 v 1418) 010 (110 per parent parent) Combined Declaration for Patent Application and Power of Attorney (Continued) (Includes Reference to PCT International Applications)

Attorney's Docket No. 4797-SPUS

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(e) or PCT international application(s) designating the United States of America that is/are listed below and, insufar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35. United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37. Code of Federal Regulations, \$1.56(a) which occurred between the filing date of the prior application(s) and the national or FCT international filing dute of this application;

PRIOR U.S. APPLICATIONS OR PCT INTERNATIONAL APPLICATIONS DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. 120:

U.S. APPLICATIONS		STATUS (check one)			
U.S. APPLICATION NUMBER		U.S. FILING DATE	PATENTED PENDING		ABANDONED
		·			
PCT APPL	ications designa	TING THE U.S.			
PCT APPLICATION NO.	PCT FILING DATE	U.S. SERIAL MUMBERS ASSIGNUD (# 00))			
PCT/DE98/01995	16 July 1998				

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following anomey(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (List name and registration number)

MYRON COHEN, Reg. No. 17,358-THOMAS C. PONTANI, Reg. No. 29,763; LANCE I. LIEBERMAN, Reg. No. 28,437; MARTIN B. PAVANE, Reg. No. 28,337; MICHAEL C. STUART, Reg. No. 35,698-KLAUS P. STOFFEL, Reg. No. 31,668; EDWARD M. WEISZ, Reg. No. 37,257; CHI K. ENG. Reg. No. 38,870; JULIA S. KIM, Reg. No. 36.567; VINCENT M. FAZZARI, Reg. No. 26.879; ALFRED W. FROEBRICH, Reg. No. 38,887; ANDRES N. MADRID, Reg. No. 40,710; KENT H. CHENG, Reg. No. 33,849; GEORGE WANG, Reg. No. 41.419; JEFFREY M. NAVON, Roy. No. 32,711 and JOHN G. TUTUNIIAN, Reg. No. 39,405.

Send correspondence to:  Thomas C. Pontani Reg. 29,763 Cohen, Pontani, Lieberman & Pavane  551 Fifth Avenue, Suite 1210 New York, New York 10176			Direct Telephone calls to: (mme and telephone number) Thomas C. Pontani (212) 687-2770	
	FULL NAME OF INVENTOR	TAMILY NAME DONNER	FIRST GIVEN NAME RAIF	SECOND CIVEN NAME
0	RESIDENCE, CITIZENSHIP	Grimma Day	STATE OR FOREIGN COUNTRY GETTIANY	COUNTRY OF CITIZENSHIP GETTIATLY
l E	POST OFFICE ADDRESS	FOST OFFICE ADDRESS / Südstrasse 31	CITY Grimma	STATE & ZIP LODE/COUNTRY Germany 04668
2	FULL NAME OF INVENTOR	PAMILY NAME DEGENKOLB	FIRST GIVEN NAME Dietmar	second given name.
0 2	RESTIVINCE, CITIZENS(IIP	Freiberg Day	STATE OR FOREIGN COUNTRY GETTLERY	COUNTRY OF CHIZENSHIP Germany
	MUST QUARTE ADDRESS	POST OFFICE ADDRESS / Mendelejewstrasse 33	crry Freiberg	STATE & ZIP CODE/COUNTRY Germany 09599

taxe 2 of 6

U.S. DEPARTMENT OF COMMENCE FRANK and Independent Office Equipment to 170 139 (REV. 1083)

	1
6	

	mbined Declaration fo		212-06/-2//0-	T49 511 5061057;# 7/
(Inc	hides Reference to PC	or l'a 212 42122 T International Applications)	Sa of Attorney (Continued)	Attorney's Docket No.
INVENTOR OF FAMILY NAME SCHINGNITZ		FIRST GIVEN NAME MAINFRED	SECOND GIVEN NAME	
2 0 3	RESIDUNCE. CITIZENSHIP	Freiberg DW	STATE OR FOREIGN COUNTRY Germany	COUNTRY OF DITIZENSHIP GEZINANY
	Post of Hice additions	Ledeburstrasse 6	cny Freiberg	STATE & ZIP CODE/COUNTRY GOTTNAMY (19599

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under §1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application of any patent issuing thereon.

SIGNATURE DE INVENTOR 201		SEGNATURE OF INVENTOR 243
DATE 01/01/2000	DATE 12/23/1999	DATE 12. 23. 99

U.S. DIPARTMENT OF COMMERCE PARK AND Tisubancar's Diffus Equivalent to 1770 139 (REV. 10 83)